


# CP-UNC-TA41L3-D

4 MP WDR Network IR Bullet Camera - 30Mtr.

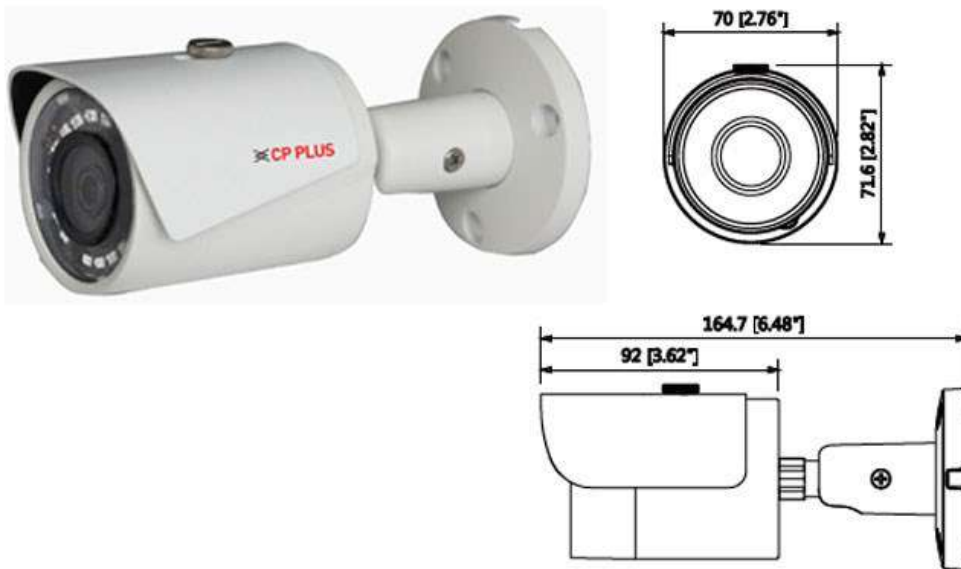

## Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max. 20fps@4MP, Max. 25/30fps@3MP
- H.265 and H.264 triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR,ROI, AWB, AGC, BLC, HLC
- 2.8mm fixed lens (3.6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



# CP-UNC-TA41L3-D

## 4 MP WDR Network IR Bullet Camera - 30Mtr.



### Feature

Image Sensor  
 Minimum Illumination  
 Effective Pixels  
 Shutter Speed  
 White Balance  
 Lens  
 Gain Control (AGC)  
 Video Compression  
 S/N Ratio  
 Back Light Compensation  
 Video Streaming  
 Resolution  
 Digital Zoom  
 Motion detection  
 Privacy Mask  
 ROI  
 Bit Rate  
 Protocol  
 Ethernet  
 User Account  
 IR  
 Smart Phone  
 Ingress Protection  
 Operating Temperature  
 Power Source  
 Power Consumption  
 Casing  
 Dimension  
 Weight

### Specification

1/3" 4MP Progressive scan CMOS  
 0.08Lux/F2.0( Color,1/3s,30IRE) 0.3Lux/F2.0( Color,1/30s,30IRE) 0Lux/F2.0(IR on)  
 2688(H) x 1520(V)  
 Auto/Manual, 1/3~1/100000s  
 Auto/Natural/Street Lamp/Outdoor/Manual  
 2.8mm(3.6mm optional)  
 Auto/Manual  
 H.265+/H.265/H.264+/H.264  
 More than 50dB  
 BLC / HLC / WDR(120dB)  
 4MP(1 ~ 20fps)/3MP (1 ~ 25/30fps), D1/CIF(1 ~ 20fps), 720P1 ~ 15fps)  
 4MP(2688x1520/2560x1440)/3MP(2304x1296)/ 1080P(1920x1080)/720P(1280x720)/ D1  
 (704x576/704x480)/ CIF(352x288/352x240)  
 16x  
 Off / On (4 Zone, Rectangle)  
 Off / On (4 Area, Rectangle)  
 Off / On (4 Zone)  
 H.265: 12K ~ 8448Kbps , H.264: 32K ~ 10240Kbps  
 HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; SNMP;  
 QoS; UPnP; NTP; ONVIF, PSIA, CGI  
 RJ-45 (10/100Base-T)  
 20 Users  
 IR Range of 30 Mtr.  
 iPhone, iPad, Android Phone  
 IP67  
 -30°C~+60°C , Less than 95%RH  
 DC12V, PoE (802.3af)  
 <5.7W  
 Metal+ Plastic  
 Ø70mm x 164.7mm  
 0.38Kg

