


**CP- UNC-TS21PL3****2 MP Full HD IR Bullet Camera - 30Mtr.****Main Features**

- 1/2.7" 2MP PS CMOS Image Sensor
- 20fps@1080P(1920×1080)
- H.265+/ H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8 mm fixed lens (3.6 mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

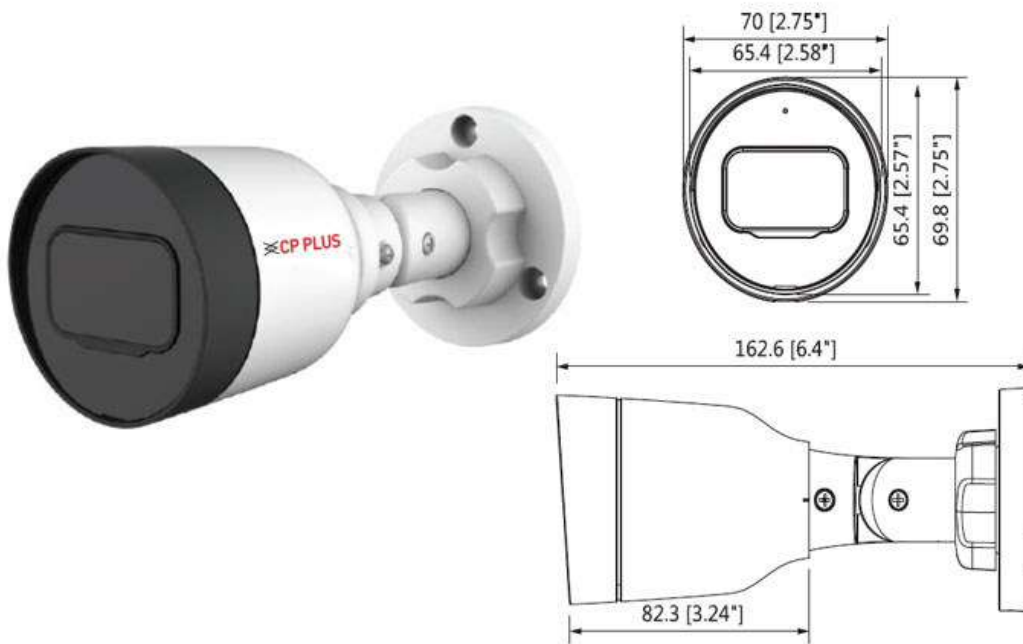

# CP- UNC-TS21PL3

## 2 MP Full HD IR Bullet Camera - 30Mtr.



### Feature

Image Sensor  
Effective Pixels  
Minimum Illumination  
White Balance  
Lens  
Gain Control (AGC)  
Angle of View  
Video Compression  
S/N Ratio  
Back Light Compensation  
Resolution  
Frame Rate  
Digital Zoom  
Motion detection  
Privacy Mask  
ICR  
ROI  
Bit Rate  
Protocol  
Ethernet  
User Account  
IR  
Smart Phone  
Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

### Specification

1/2.7" 2MP PS CMOS Image Sensor  
1920(H)x1080(V)  
0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)  
Auto/Natural/Street Lamp/Outdoor/Manual  
2.8mm fixed lens (3.6mm optional)  
Auto/Manual  
H:115°/87.5°, V:60°/47°  
H.265+/H.265/H.264+/H.264H/MJPEG (Sub Stream)  
More than 50dB  
BLC/ HLC/ DWDR  
1080P(1920×1080)/1.3M(1280×960)/ 720P(1280×720)/D1(704×576/704×480)/VGA  
(640×480)/ CIF(352×288/352×240)  
Main Stream: 1080P (1 ~ 20fps) ,Sub Stream: D1(1 ~ 25/30fps)  
16x  
Off / On (4 Zone, Rectangle)  
Off / On (4 Area, Rectangle)  
Auto (ICR)/Color/B/W  
Off / On (4 Zone)  
H265:12K~5632K , H.264:32K ~8192K  
HTTP; TCP; ARP; RTSP; RTP; RTCP; UDP; DHCP; DNS; IPV4; NTP; Multicast; ICMP; TLS; ONVIF  
Profile S & G  
RJ-45 (10/100Base-T)  
20 Users  
IR Range of 30 Mtr.  
iPhone, iPad, Android Phone  
-30°C~+60°C , Less than 95%RH  
DC12V, PoE (802.3af)  
<4.2W  
IP67  
Φ70mm×162.6mm(2.76"x6.49")  
0.22Kg

