


# CP-UNC-TS25ML3

2 MP Full HD IR Bullet Camera - 30Mtr.

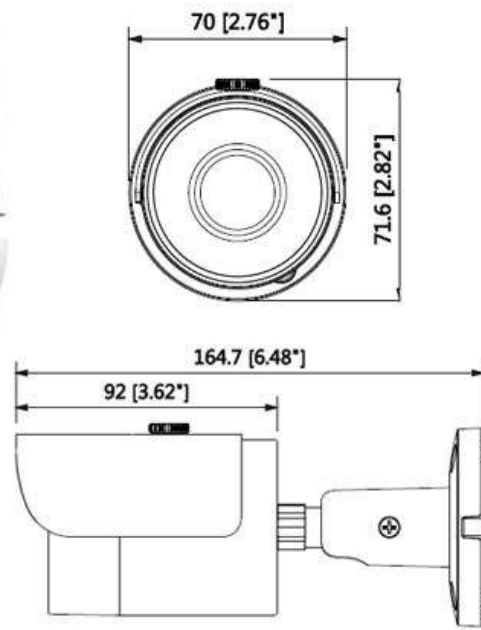

### Main Features

- 1/2.7" 2MP PS CMOS Image Sensor
- 25/30fps@1080P(1920x1080)
- H.265+ / H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8 mm fixed lens (3.6 mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



# CP-UNC-TS25ML3

2 MP Full HD IR Bullet Camera - 30Mtr.



## Feature

Image Sensor  
 Effective Pixels  
 Minimum Illumination  
 White Balance  
 Lens  
 Gain Control (AGC)  
 Angle of View  
 Video Compression  
 S/N Ratio  
 Back Light Compensation  
 Resolution  
 Frame Rate  
 Digital Zoom  
 Motion detection  
 Privacy Mask  
 ICR  
 ROI  
 Bit Rate  
 Protocol  
 Ethernet  
 User Account  
 IR  
 Smart Phone  
 Operating Temperature  
 Power Source  
 Power Consumption  
 Weatherproof Standard  
 Dimension  
 Weight

## Specification

1/2.7" 2MP PS CMOS Image Sensor  
 1920(H)x1080(V)  
 0.09Lux/F2.0( Color,1/3s,30IRE) 0.5Lux/F2.0( Color,1/30s,30IRE) 0Lux/F2.0(IR on)  
 Auto/Natural/Street Lamp/Outdoor/Manual  
 2.8mm fixed lens (3.6mm optional)  
 Auto/Manual  
 H:115°/87.5°, V:60°/47°  
 H.265+/H.265/H.264+/H.264H/MJPEG (Sub Stream)  
 More than 50dB  
 BLC/ HLC/ DWDR  
 1080P(1920×1080)/1.3MP(1280×960)/ 720P(1280×720)/D1(704×576/704×480)/ CIF  
 (352×288/352×240)  
 Main Stream: 1080P (1 ~ 25/30fps) Sub Stream: D1(1 ~ 25/30fps)  
 16x  
 Off / On (4 Zone, Rectangle)  
 Off / On (4 Area, Rectangle)  
 Auto (ICR)/Color/B/W  
 Off / On (4 Zone)  
 H265: 12K~6400K, H.264: 32K ~8192K  
 HTTP; TCP; ARP; RTSP; RTP; RTCP; UDP; DHCP; DNS; IPV4; NTP; Multicast; ICMP; TLS, ONVIF  
 Profile S&G  
 RJ-45 (10/100Base-T)  
 20 Users  
 IR Range of 30 Mtr.  
 iPhone, iPad, Android Phone  
 -30°C~+60°C , Less than 95%RH  
 DC12V, PoE (802.3af)  
 <4.2W  
 IP67  
 Ø70mm×162.6mm(2.76"×6.49")  
 0.22Kg