


CP- VAC-D20L2

2 MP Full HD IR Dome Camera - 20 Mtr.

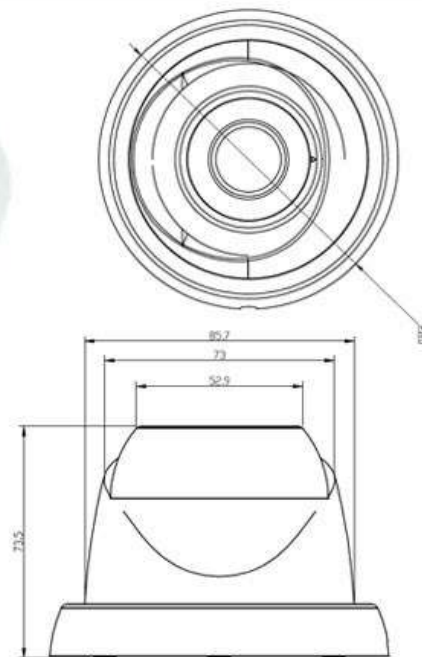

Main Features

- 1/2.9" 2MP HQIS Pro Image Sensor
- 25/30fps@2MP
- Day/Night (ICR), 3D-DNR, AWB, AGC, BLC
- Plug-n-Play HD/SD Camera
- 3.6mm Lens
- Equipped with fine IR LEDs for clearer night vision
- IR Range of 20 Mtr.
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs



CP- VAC-D20L2

2 MP Full HD IR Dome Camera - 20 Mtr.



Feature

Specification

| | |
|-------------------------|--|
| Image Sensor | 1/2.9" 2MP HQIS Pro Image Sensor |
| Minimum Illumination | Color(0.1Lux) , (0 Lux IR LED On) |
| Shutter Speed | 1/50s(1/60s)-1/100,000s (Auto/Fixed) |
| White Balance | Auto |
| Gain Control (AGC) | Auto |
| Lens | 3.6mm |
| S/N Ratio | ≥36dB |
| Back Light Compensation | Auto |
| Video Output | 1.0Vp-p Composite Output (75Ω / BNC) , HD-AHD(1080P)\ HD-TVI(1080P)\ HD-CVI(1080P)\ CVBS , CVI Default setting |
| Resolution | 1080P |
| Frame Rate | 30fps(60Hz) ,25fps(50Hz) |
| ICR | Support |
| Gamma Correction | 0.45 |
| IR | IR Range of 20 Mtr. |
| No. of IR LEDs | 12pcs |
| Operating Temperature | -20°C~+55°C |
| Humidity | 10% ~ 90% , ≤95% RH no dew |
| Power Source | DC12V(+/-10%) |
| Power Consumption | 0.4W(2.5W after IR LED Powered on) |
| Dimension | 108mm x 108mm x 73.5mm |
| Weight | 0.25KG |