


# CP- VAC-D40L2

4 MP Full HD IR Dome Camera - 20 Mtr.

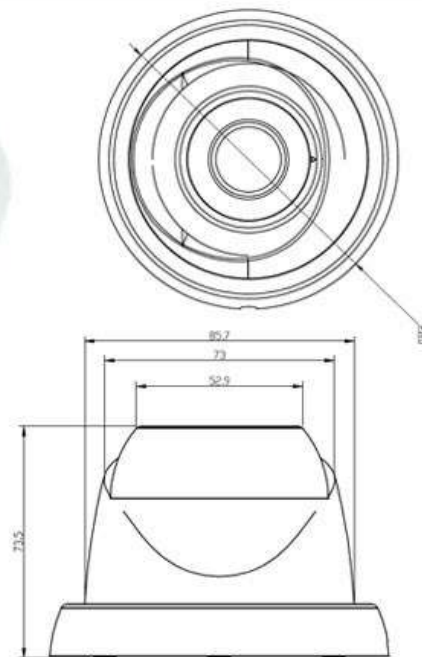

## Main Features

- 1/2.7" 4 MP HQIS Pro Image Sensor
- 25/30fps@4MP
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- Plug-n-Play HD/SD Camera
- 3.6mm Lens
- Equipped with fine IR LEDs for clearer night vision
- IR Range of 20 Mtr.
- Compatible with HDx, AHD, HDCVI, CVBS, HDTVI DVRs



# CP- VAC-D40L2

4 MP Full HD IR Dome Camera - 20 Mtr.



## Feature

Image Sensor  
 Minimum Illumination  
 Shutter Speed  
 White Balance  
 Gain Control (AGC)  
 Lens  
 Back Light Compensation  
 S/N Ratio  
 Video Output  
 Resolution  
 Frame Rate  
 ICR  
 Gamma Correction  
 OSD  
 IR  
 No. of IR LEDs  
 Operating Temperature  
 Humidity  
 Power Source  
 Power Consumption  
 Dimension  
 Weight

## Specification

1/2.7" 4 MP HQIS Pro Image Sensor  
 Color(0.1Lux),White and Black (0.01Lux IR LED On)  
 1/50s(1/60s)-1/100,000s (Auto/Fixed)  
 AWB/AWC/Auto - Set/Indoor/Outdoor/Manual  
 Auto  
 3.6mm  
 BLC/ HLC/ DWDR  
 ≥36.8dB  
 1.0Vp-p Composite Output (75Ω / BNC), HD-AHD(4MP)\ HD-TVI(4MP)\ HD-CVI(4MP)\ CVBS ,  
 CVI Default setting  
 4MP (2560(H)×1440(V))  
 Main Stream: 30fps (60Hz) , 25fps (50Hz)  
 Auto/ White and Black/ Color/ External control OSD adjustable  
 0.45  
 Supports  
 IR Range of 20 Mtr.  
 12pcs  
 -10°C~ 55°C  
 10% ~ 90% (humidity) , ≤95% RH no dew  
 DC12V(+/-15%)  
 0.4W(2.5W after IR LED Powered on)  
 108mm x 108mm x 73.5mm  
 0.25 KG